

ZEPHYR®
TOOL
GROUP



TOOLS ENGINEERED TO PERFORM



ZEPHYR®
AEROSPACE HAND & PNEUMATIC TOOLS

LOK-FAST™
AEROSPACE FASTENER TOOLS

KWIK-LOK™
TEMPORARY FASTENERS

Martin™
AIRCRAFT TOOL

Kwik-Lok® Temporary Fasteners



ZEPHYR TOOL GROUP

201 Hindry Avenue
Inglewood, CA 90301

Tel. 310-410-4907 ■ Email: sales@zephyrtoolgroup.com ■ zephyrtoolgroup.com



PLIER-OPERATED TEMPORARY FASTENER

A diversity of plier actuated clamps for precise holding of materials

K

The K-type sheet holder clamp is the standard KWIK-LOK[®] clamp. It is pliers-actuated, spring loaded and steel bodied; it is effective for most space requirements.



KK

The KK-type sheet holder clamp is designed for those space requirements which prohibit the use of the standard K-type clamp. The KK-type is a miniature clamp, with a shorter overall body and special effectiveness for more confined areas.



K/KEL

The KL and KEL-type clamps are standard K-type clamps with an extended grip range.





KHD

The KHD clamp is designed specifically for heavier applications requiring an extended grip range not available in the standard K through KL series of sheet metal holders.





HOW TO SELECT A PART NUMBER

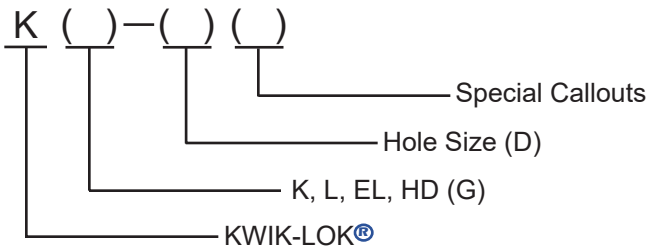

KT

The KT is a variation of the standard K series. It has a pilot with which to index into holes through templates or outer material thicknesses.

HOW TO DETERMINE A TEMPLATE CLAMP PART NUMBER (K-KL SERIES)

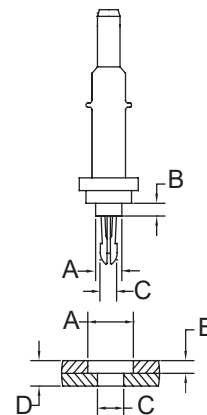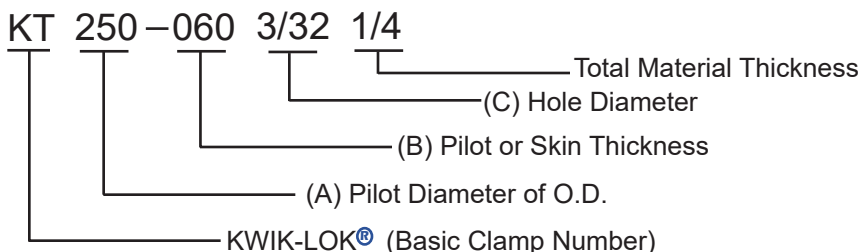



ORDERING INFORMATION

PLIER OPERATED FASTENERS

PART NO.	CROSS REFERENCE EQUIVALENT	COLOR CODE	G (grip)	D (diameter)	DRILL SIZE
K-1/16	M-1/16	black	0 - 1/4"	1/16"	1/16"
K-3/32	M-3/32	zinc		3/32"	#40
K-1/8	M-1/8	copper		1/8"	#30
K-5/32	M-5/32	black		5/32"	#20
K-3/16	M-3/16	brass		3/16"	#10
K-7/32	M-7/32	zinc		7/32"	7/32"
K-1/4	M-1/4	copper		1/4"	1/4"
KK-3/32	MM-3/32	zinc	0 - 1/4	3/32"	#40
KK-1/8	MM-1/8	copper		1/8"	#30
KK-5/32	MM-5/32	black		5/32"	#20
KK-3/16	MM-3/16	brass		3/16"	#10
KL-3/32	ML-3/32	zinc	1/4"-1/2"	3/32"	#40
KL-1/8	ML-1/8	copper		1/8"	#30
KL-5/32	ML-5/32	black		5/32"	#20
KL-3/16	ML-3/16	brass		3/16"	#10
KEL-3/32	MEL-3/32	zinc	1/2" - 3/4"	3/32"	#40
KEL-1/8	MEL-1/8	copper		1/8"	#30
KEL-5/32	MEL-5/32	black		5/32"	#20
KEL-3/16	MEL-3/16	brass		3/16"	#10
KHD-3/32	MHD-3/32	zinc	0 - 1/2"	3/32"	#40
KHD-1/8	MHD-1/8	copper		1/8"	#30
KHD-5/32	MHD-5/32	black		5/32"	#20
KHD-3/16	MHD-3/16	brass		3/16"	#10
KHD-7/32	MHD-7/32	zinc		7/32"	7/32"
KHD-1/4	MHD-1/4	copper		1/4"	1/4"

Special Callouts AL = Aluminum Body BO = Black Oxide



POWER-OPERATED & MANUAL TEMPORARY FASTENERS

FREE WHEELING

POWER - HEX NUT TYPE

KHNS
KHN
KHNL
KHNC



For high production applications that require a consistent, uniform clamping force. Pneumatic driven with the Power Nut Runner KNR2000 (pg 5), this time-saving fastener is well suited for both metallic and composite materials.


MANUAL - WING NUT TYPE

KWNS
KWN
KWNL
KWNC



For low production rates and high-clamping force applications. Because this fastener is manually controlled, the clamping force can range from zero to 300 lbs. Well-suited for all types of metallic and composite materials.

HOW TO SELECT PART NUMBER

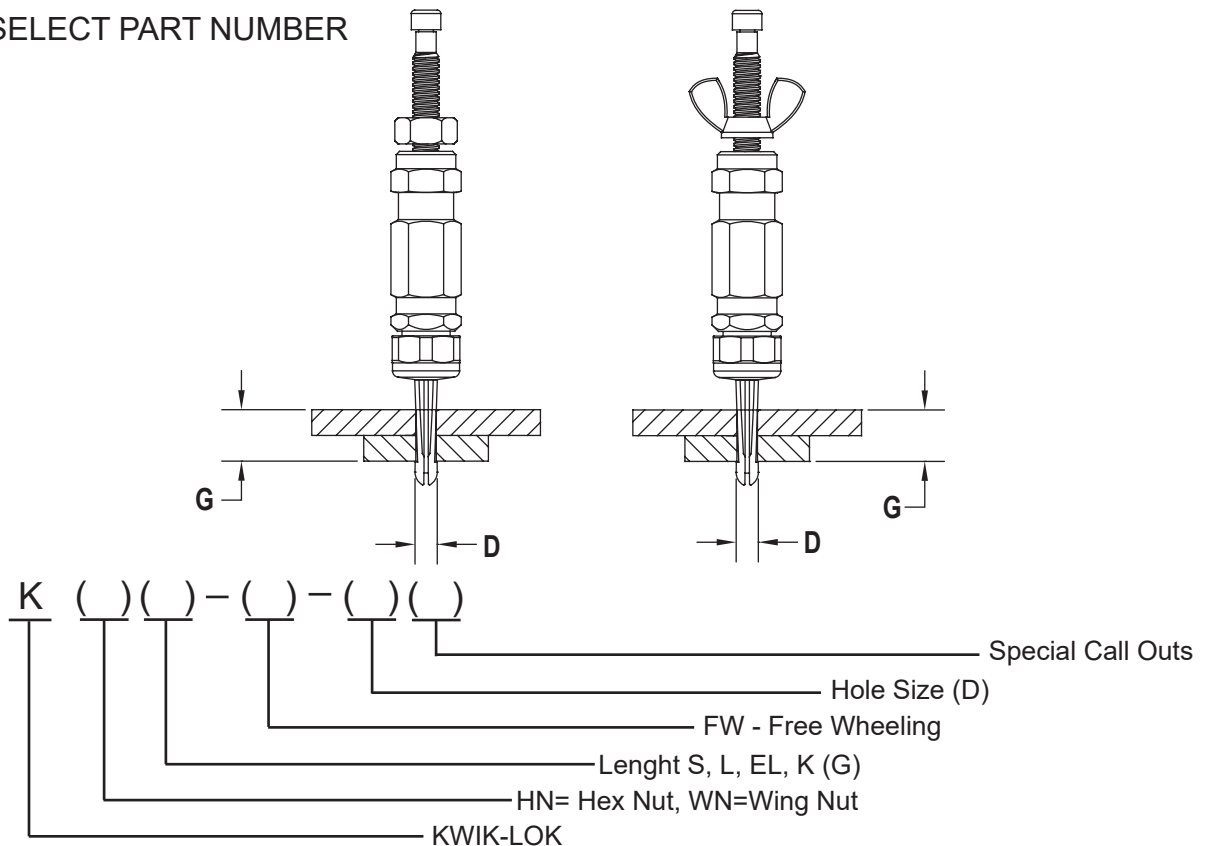

**POWER-OPERATED
TEMPORARY FASTENERS****ORDERING INFORMATION**

HEX NUT PART NO.	CROSS REFERENCE EQUIVALENT	COLOR CODE	G (grip)	D (diameter)	DRILL SIZE
KHNS-FW-3/32	HNXS-SF-3/32	silver	0-5/16"	3/32"	#40
KHNS-FW-1/8	HNXS-SF-1/8	copper		1/8"	#30
KHNS-FW-5/32	HNXS-SF-5/32	black		5/32"	#20
KHNS-FW-3/16	HNXS-SF-3/16	brass		3/16"	#10
KHNS-FW-1/4	HNXS-SH/4	copper		1/4"	1/4"
KHN-FW-3/32	HNX-SF-3/32	silver	0- 1/2"	3/32"	#40
KHN-FW-1/8	HNX-SF-1/8	copper		1/8"	#30
KHN-FW-5/32	HNX-SF-5/32	black		5/32"	#20
KHN-FW-3/16	HNX-SF-3/16	brass		3/16"	#10
KHN-FW-7/32	HNX-SF-7/32	silver		7/32"	7/32"
KHN-FW-1/4	HNX-SF-1/4	copper		1/4"	1/4"
KHN-FW-5/16	HNX-SF-5/16	black		5/16"	5/16"
KHNL-FW-3/32	HNXL-SF-3/32	silver	0-1"	3/32"	#40
KHNL-FW-1/8	HNXL-SF-1/8	copper		1/8"	#30
KHNL-FW-5/32	HNXL-SF-5/32	black		5/32"	#20
KHNL-FW-3/16	HNXL-SF-3/16	brass		3/16"	#10
KHNL-FW-7/32	HNXL-SF-7/32	silver		7/32"	7/32"
KHNL-FW-1/4	HNXL-SF-1/4	copper		1/4"	1/4"
KHNL-FW-5/16	HNXL-SF-5/16	black		5/16"	5/16"
KHNEL-FW-3/32	HNXEL-SF-3/32	silver	1/2" -1 1/2"	3/32"	#40
KHNEL-FW-1/8	HNXEL-SF-1/8	copper		1/8"	#30
KHNEL-FW-5/32	HNXEL-SF-5/32	black		5/32"	#20
KHNEL-FW-3/16	HNXEL-SF-3/16	brass		3/16"	#10
KHNEL-FW-1/4	HNXEL-SF-1/4	copper		1/4"	1/4"
KHNEL-FW-5/16	HNXEL-SF-5/16	black		5/16"	5/16"
KHNK-FW-1/8	HNXK-SH-1/8	copper	1 1/2" - 2 1/2"	1/8"	#30
KHNK-FW-5/32	HNXK-SF-5/32	black		5/32"	#20
KHNK-FW-3/16	HNXK-SF-3/16	brass		3/16"	#10
KHNK-FW-1/4	HNXK-SH-1/4	copper		1/4"	1/4"
KHNK-FW-5/16	HNXK-SF-5/16	black		5/16"	5/16"

Special Callouts AL= Aluminum Body BO = Black Oxide AC = Aluminum Cap C = Plastic Cap



MANUAL-OPERATED TEMPORARY FASTENERS

ORDERING INFORMATION

WING NUT PART NO.	CROSS REFERENCE EQUIVALENT	COLOR CODE	G (grip)	D (diameter)	DRILL SIZE
KWNS-FW-3/32	WNXS-3/32	silver	0-5/16"	3/32"	#40
KWNS-FW-1/8	WNXS-1/8	copper		1/8"	#30
KWNS-FW-5/32	WNXS-5/32	black		5/32"	#20
KWNS-FW-3/16	WNXS-3/16	brass		3/16"	#10
KWNS-FW-1/4	WNXS-1/4	copper		1/4"	1/4"
KWN-FW-3/32	WNX-3/32	silver	0- 1/2"	3/32"	#40
KWN-FW-1/8	WNX-1/8	copper		1/8"	#30
KWN-FW-5/32	WNX-5/32	black		5/32"	#20
KWN-FW-3/16	WNX-3/16	brass		3/16"	#10
KWN-FW-7/32	WNX-7/32	silver		7/32"	7/32"
KWN-FW-1/4	WNX-1/4	copper	0-1"	1/4"	1/4"
KWN-FW-5/16	WNX-5/16	black		5/16"	5/16"
KWNL-FW-3/32	WNXL-3/32	silver		3/32"	#40
KWNL-FW-1/8	WNXL-1/8	copper		1/8"	#30
KWNL-FW-5/32	WNXL-5/32	black		5/32"	#20
KWNL-FW-3/16	WNXL-3/16	brass		3/16"	#10
KWNL-FW-7/32	WNXL-7/32	silver		7/32"	7/32"
KWNL-FW-1/4	WNXL-1/4	copper	1/2" - 1 1/2"	1/4"	1/4"
KWNL-FW-5/16	WNXL-5/16	black		5/16"	5/16"
KWNEL-FW-3/32	WNXEL-3/32	silver		3/32"	#40
KWNEL-FW-1/8	WNXEL-1/8	copper		1/8"	#30
KWNEL-FW-5/32	WNXEL-5/32	black		5/32"	#20
KWNEL-FW-3/16	WNXEL-3/16	brass		3/16"	#10
KWNEL-FW-1/4	WNXEL-1/4	copper		1/4"	1/4"
KWNEL-FW-5/16	WNXEL-5/16	black	1 1/2" - 2 1/2"	5/16"	5/16"
KWNK-FW-1/8	WNXK-1/8	copper		1/8"	#30
KWNK-FW-5/32	WNXK-5/32	black		5/32"	#20
KWNK-FW-3/16	WNXK-3/16	brass		3/16"	#10
KWNK-FW-1/4	WNXK-1/4	copper		1/4"	1/4"
KWNK-FW-5/16	WNXK-5/16	black		5/16"	5/16"

Special Callouts AL= Aluminum Body BO = Black Oxide AC = Aluminum Cap C = Plastic Cap



POWER NUT RUNNER


For use with all KHN's series Fasteners



KNR2000

A simple to operate, rugged power tool for installation and removal of all power operated fasteners. Quiet precise and made in the U.S.A.

- Heavy duty, yet light weight
- Simple to insert and remove hex nut fasteners
- Small nose piece allows easy accessibility where fasteners are close together
- Reversible motor with finger tip control for switching to reverse
- Greater torque in reverse for those difficult removals

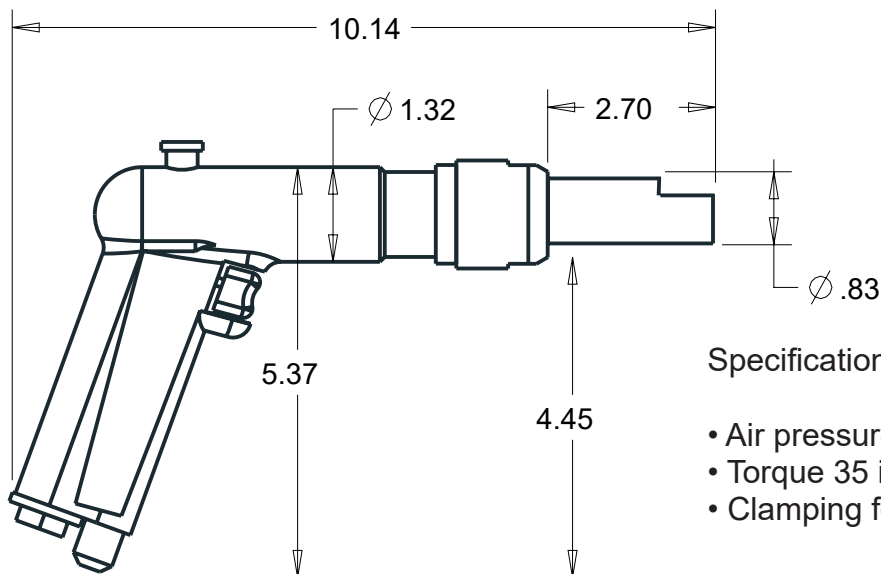

Specifications:

- Air pressure 85 -100 PSI
- Torque 35 in. lbs. max.
- Clamping force up to 360 lbs.



DRILL STOP & CLAMP

KDS DRILL STOP

KWIK-LOK® manufactures a unique multipurpose tool designed to reduce drill bit breakage. These drill stops have a coiled spring to cushion the drill break-through.

Rounded smooth face eliminates marking and prevents the chuck jaws from marring the surface.



DRILL STOP ORDERING INFORMATION

PART NO	EQUIVALENT	COLOR CODE	DRILL SIZE
KDS 50	DS 50	black	#50
KDS 40	DS 40	zinc	#40
KDS 30	DS 30	copper	#30
KDS 28	DS 28	zinc	#28
KDS 21	DS 21	black	#21
KDS 20	DS 20	zinc	#20
KDS 12	DS 12	brass	#10
KDS 10	DS 10	brass	#10
KDS 1/4	DS 1/	copper	1/4"
KDS 5/16	DS 5/16	copper	5/16"


NOTE: Other sizes available on request.



HANDI-KLAMPS

Zephyr Handi-Klamps are a versatile tool for clamping a wide range of surfaces, shapes, thicknesses and materials. Handi-Klamps are ideal for holding the

PART NO.	EQUIVALENT	CLAMPING CAPACITY	JAW DEPTH
K-1	W-1	0 - 5/16"	1"
K-2	W-2	0 - 5/16"	1 - 1/2"







SIDE GRIP & TEMPORARY FASTENERS KITS

KSG SIDE GRIPS

Pliers operated edge klamps hold materials together where no holes are provided. Ideal for bonding, gluing and sealants.

SIDE GRIP ORDERING INFORMATION

PART NO.	EQUIVALENT	COLOR CODE	MATERIAL THICKNESS
KSG 1/2" x 1/2"	SG 1/2" x 1/2"	Copper	0 - 1/2"
KSG 3/4"x 1/2"	SG 3/4" x 1/2"	Brass	0 - 3/4"
KSG 1/2"x 1"	SG 1/2" x 1"	Copper	0 - 1/2"
KSG 3/4"x 1"	SG 3/4" x 1"	Brass	0 - 3/4"

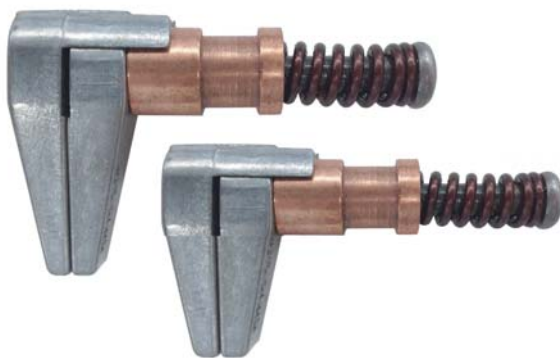

Temporary Fasteners kits

Zephyr offers a selection of Kwik-Lok temporary fasteners in convenient kit form. Each kit consists of Zephyr temporary fasteners, K-200 pliers, and carrying case.



ZKLS-1

Includes Pliers, two 1/2"x1" edge grip clamps, one each of hole clamps in sizes 3/32", 1/8", 3/16", 1/4".

ZKLS-2

Includes Pliers, ten of hole clamps in sizes 3/32", 1/8", 5/32", 3/16", 1/4".

ZKLS-3

Includes Pliers, six each of side clamps in sizes 1/2"x1", and 3/4"x1".




KBN Bar Nut

Manually Operated Temporary Fastener

Part No.	Cross Ref. Equivalent	Color Code	G(grip)	D(diel.)	Drill Size
KBNS-FW-3/32	BNXS- 3/32	silver	0-5/16"	3/32"	#40
KBNS-FW-1/8	BNXS- 1/8	copper		1/8"	#30
KBNS-FW- 5/32	BNXS- 5/32	black		5/32"	#20
KBNS-FW- 3/16	BNXS- 3/16	brass		3/16"	#10
KBNS-FW-1/4	BNXS- 1/4	copper		1/4"	1/4"
KBN-FW- 3/32	BNX- 3/32	silver	0-1/2"	3/32"	#40
KBN-FW- 1/8	BNX- 1/8	copper		1/8"	#30
KBN-FW- 5/32	BNX- 5/32	black		5/32"	#20
KBN-FW- 3/16	BNX-3/16	brass		3/16"	#10
KBN-FW- 7/32	BNX- 7/32	silver		7/32"	7/32"
KBN-FW- 1/4	BNX- 1/4	copper	0-1"	1/4"	1/4"
KBN-FW- 5/16	BNX- 5/16	black		5/16"	5/16"
KBNL-FW- 3/32	BNXL- 3/32	silver		3/32"	#40
KBNL-FW- 1/8	BNXL- 1/8	copper		1/8"	#30
KBNL-FW- 5/32	BNXL- 5/32	black		5/32"	#20
KBNL-FW- 3/16	BNXL- 3/16	brass		3/16"	#10
KBNL-FW- 7/32	BNXL- 7/32	silver	1/2- 1 1/2"	7/32"	7/32"
KBNL-FW- 1/4	BNXL- 1/4	copper		1/4"	1/4"
KBNL-FW- 5/16	BNXL- 5/16	black		5/16"	5/16"
KBNEL-FW- 3/32	BNXEL- 3132	silver		3/32"	#40
KBNEL-FW- 1/8	BNXEL- 1/8	copper		1/8"	#30
KBNEL-FW- 5/32	BNXEL- 5/32	black	1 1/2-21/2"	5/32"	#20
KBNEL-FW- 3/16	BNXEL- 3/16	brass		3/16"	#10
KBNEL-FW- 1/4	BNXEL- 1/4	copper		1/4"	1/4"
KBNEL-FW- 5/16	BNXEL- 5/16	black		5/16"	5/16"
KBNK-FW-1/8	BNXK- 1/8	copper		1/8"	#30
KBNK-FVI/-5/32	BNXK- 5/32	black		5/32"	#20
KBNK-FW-3/16	BNXK- 3/16	brass		3/16"	#10
KBNK-FW-1/4	BNXK- 1/4	copper		1/4"	1/4"
KBNK-FW-5/16	BNXK- 5/16	black		5/16"	5/16"

This temporary fastener is designed for low production and high clamping force applications.

The bar nut design enables the operator to apply the greatest amount of clamping force in a manual operation.

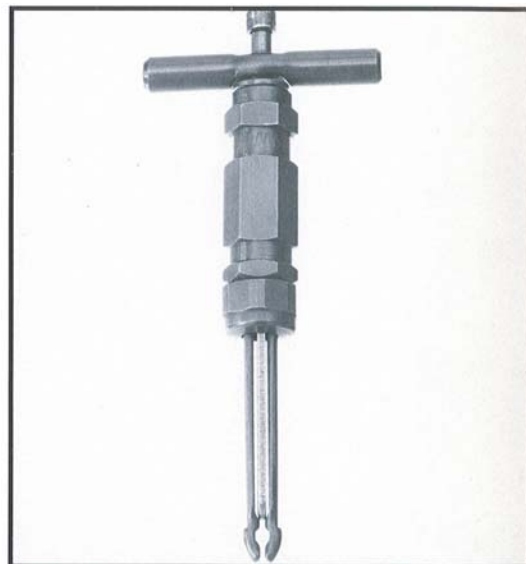

Special Callouts AL= Aluminum Body BO =Black Oxide AC =Aluminum Cap C=Plastic Cap



Kwik-Lok[®]

Temporary Fastener

PROTECTIVE CAPS FOR Pliers Operated Fasteners

K, KL, KEL

PART No.	NOMINAL SIZE	COLOR
KN23-3/32F	3/32	GRAY
KN23-1/8F	1/8	ORANGE
KN23-5/32F	5/32	BLACK
KN23-3/16F	3/16	BLUE
KN24-7/32F	7/32	GREEN
KN24-1/4F	1/4	YELLOW

KHD, KK

PART No.	NOMINAL SIZE	COLOR
KN24-3/32F	3/32	GRAY
KN24-1/8F	1/8	ORANGE
KN24-5/32F	5/32	BLACK
KN24-3/16F	3/16	BLUE
KN24-7/32F	7/32	GREEN
KN24-1/4F	1/4	YELLOW

PROTECTIVE CAPS FOR Power Operated & Manual Temporary Fasteners

POWER-HEX NUT TYPE **KHNS, KHN, KHNL, KHNL, KHNK**

MANUAL-HEX NUT TYPE **KWNS, KWN KWNL, KWNL, KWNK**

PART No.	NOMINAL SIZE	COLOR
KN25-4F	3/32	GRAY
KN25-2F	1/8	ORANGE
KN25-5F	5/32	BLACK
KN25-1F	3/16	BLUE
KN25-7F	7/32	GREEN
KN25-3F	1/4	YELLOW
KN25-6F	5/16	RED





POWER-OPERATED CYLINDRICAL BODY TEMPORARY FASTENERS

ORDERING INFORMATION

HOW TO SELECT PART NUMBER

KW () () - () - () ()

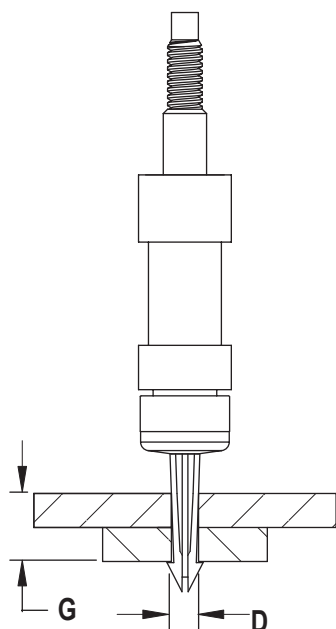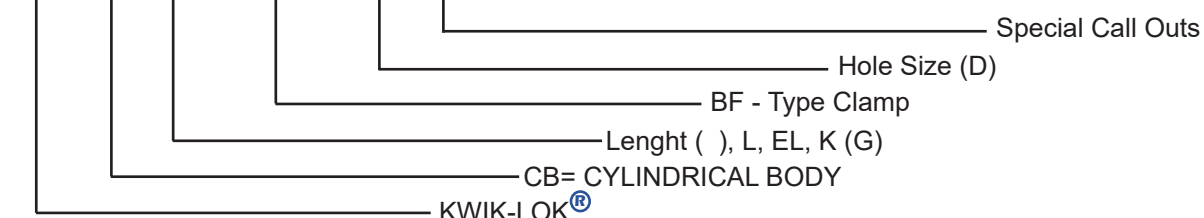

CYLINDRICAL BODY PART NO.	CROSS REFERENCE EQUIVALENT	COLOR CODE	G (grip)	D (diameter)	DRILL SIZE
KWCB-BF-3/32	CBX-BF-3/32	silver	0- 1/2"	3/32"	#40
KWCB-BF-1/8	CBX-BF-1/8	copper		1/8"	#30
KWCB-BF-5/32	CBX-BF-5/32	black		5/32"	#20
KWCB-BF-3/16	CBX-BF-3/16	brass		3/16"	#10
KWCB-BF-7/32	CBX-BF-7/32	silver		7/32"	7/32"
KWCB-BF-1/4	CBX-BF-1/4	copper		1/4"	1/4"
KWCB-BF-5/16	CBX-BF-5/16	black	0-1"	5/16"	5/16"
KWCBL-BF-3/32	CBXL-BF-3/32	silver		3/32"	#40
KWCBL-BF-1/8	CBXL-BF-1/8	copper		1/8"	#30
KWCBL-BF-5/32	CBXL-BF-5/32	black		5/32"	#20
KWCBL-BF-3/16	CBXL-BF-3/16	brass		3/16"	#10
KWCBL-BF-7/32	CBXL-BF-7/32	silver		7/32"	7/32"
KWCBL-BF-1/4	CBXL-BF-1/4	copper		1/4"	1/4"
KWCBL-BF-5/16	CBXL-BF-5/16	black	1/2" - 1 1/2"	5/16"	5/16"
KWCBEL-BF-3/32	CBXEL-BF-3/32	silver		3/32"	#40
KWCBEL-BF-1/8	CBXEL-BF-1/8	copper		1/8"	#30
KWCBEL-BF-5/32	CBXEL-BF-5/32	black		5/32"	#20
KWCBEL-BF-3/16	CBXEL-BF-3/16	brass		3/16"	#10
KWCBEL-BF-1/4	CBXEL-BF-1/4	copper		1/4"	1/4"
KWCBEL-BF-5/16	CBXEL-BF-5/16	black	1 1/2" - 2 1/2"	5/16"	5/16"
KWCBK-BF-1/8	CBXK-BF-1/8	copper		1/8"	#30
KWCBK-BF-5/32	CBXK-BF-5/32	black		5/32"	#20
KWCBK-BF-3/16	CBXK-BF-3/16	brass		3/16"	#10
KWCBK-BF-1/4	CBXK-BF-1/4	copper		1/4"	1/4"
KWCBK-BF-5/16	CBXK-BF-5/16	black		5/16"	5/16"

Special Callouts AL= Aluminum Body BO = Black Oxide AC = Aluminum Cap C = Plastic Cap




CYLINDRICAL BODY FASTENER INSTALLATION AND REMOVAL TOOL

KCB2000

A simple to operate, rugged power tool for installation and removal of all cylindrical body fasteners. Made in the U.S.A.



- Automatic Orientation - Tool onto fastener
 - Heavy duty, yet light weight
- Simple to insert and remove cylindrical body fasteners
- Reversible motor with finger tip control for switching to reverse
 - Greater torque in reverse for those difficult removals
- Air pressure 85 - 100 PSI
 - Torque 35 in. lbs. max.
- Clamping force up to 360 lbs.

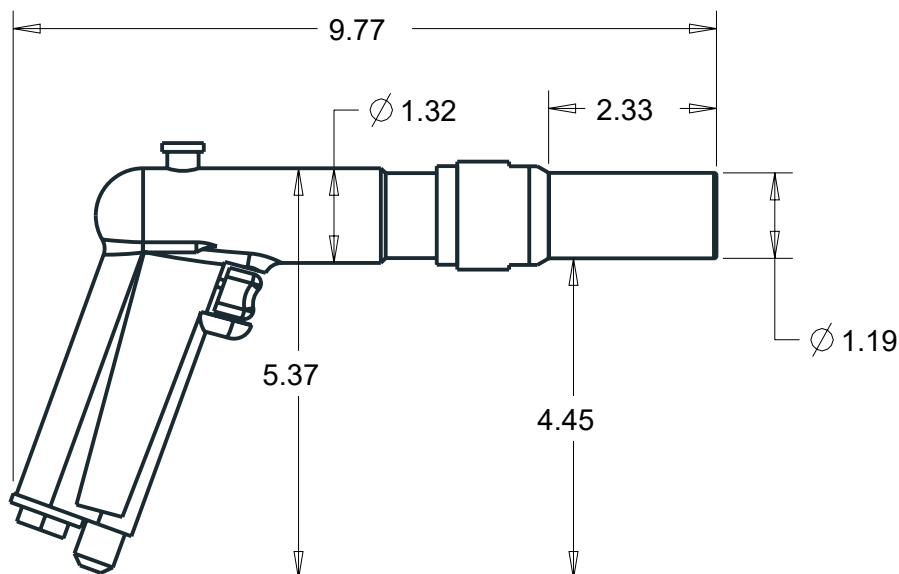

Standard Color - Blue
(shown above and below)



FOD Colors Available,
(Green Shown below)



* Other colors available upon request
(MOQ or upcharge apply)



CYLINDRICAL BODY FASTENER INSTALLATION AND REMOVAL TOOL

NEW

Adjustable Torque Programmable RPM

KCB2000-MK

A simple to operate, rugged power tool for installation and removal of all cylindrical body fasteners.



- Automatic Orientation - Tool onto fastener
- Heavy duty, yet light weight
- Simple to insert and remove cylindrical body fasteners
- Reversible motor with finger tip control for switching to reverse
- Greater torque in reverse for those difficult removals
- Torque 35 in. lbs. max. (Adjustable +/-10% tolerance range)
- Clamping force varies.
- RPM programmable via USB

Available Torque (in-lbs)	RPM
9-35	150-900

Battery & Charger Sold Separately
Please specify charger voltage when ordering



POWER NUT RUNNER

For use with all KHN's series Fasteners

NEW

Adjustable Torque Programmable RPM

KNR2000-MK

A simple to operate, rugged power tool for installation and removal.



- Heavy duty, yet light weight
- Simple to insert and remove hex nut fasteners
- Reversible motor with finger tip control for switching to reverse
- Greater torque in reverse for those difficult removals
- Torque 35 in. lbs. max.(Adjustable +/-10% tolerance range)
- Clamping force varies.
- RPM programmable via USB

Available Torque (in-lbs)	RPM
9-35	150-900




Super Kwik-Lok® TEMPORARY FASTENERS

DIFFERENT STYLES TO ACCOMMODATE YOUR FASTENING NEEDS



KSK Style
Basic fastener



KSKC Style
Customizable
bushing available



KSKF Style
For use on
countersink holes



KSKJ Style
For jig fixtures




Torque Clamping Chart

How to select the proper fastener for your application

1. KSK Super Kwik-Lok (For style: KSK, KSKC, KSKF, KSKJ):

KSK Hole Callout	Nominal Size	Torque in-lbs	Maximum Clamp Load
187	3/16" (.1875)	36	750
250	1/4" (.250)	54	1125
312	5/16" (.3125)	87	1800
375	3/8" (.375)	97	2000
437	7/16" (.4375)	109	2250

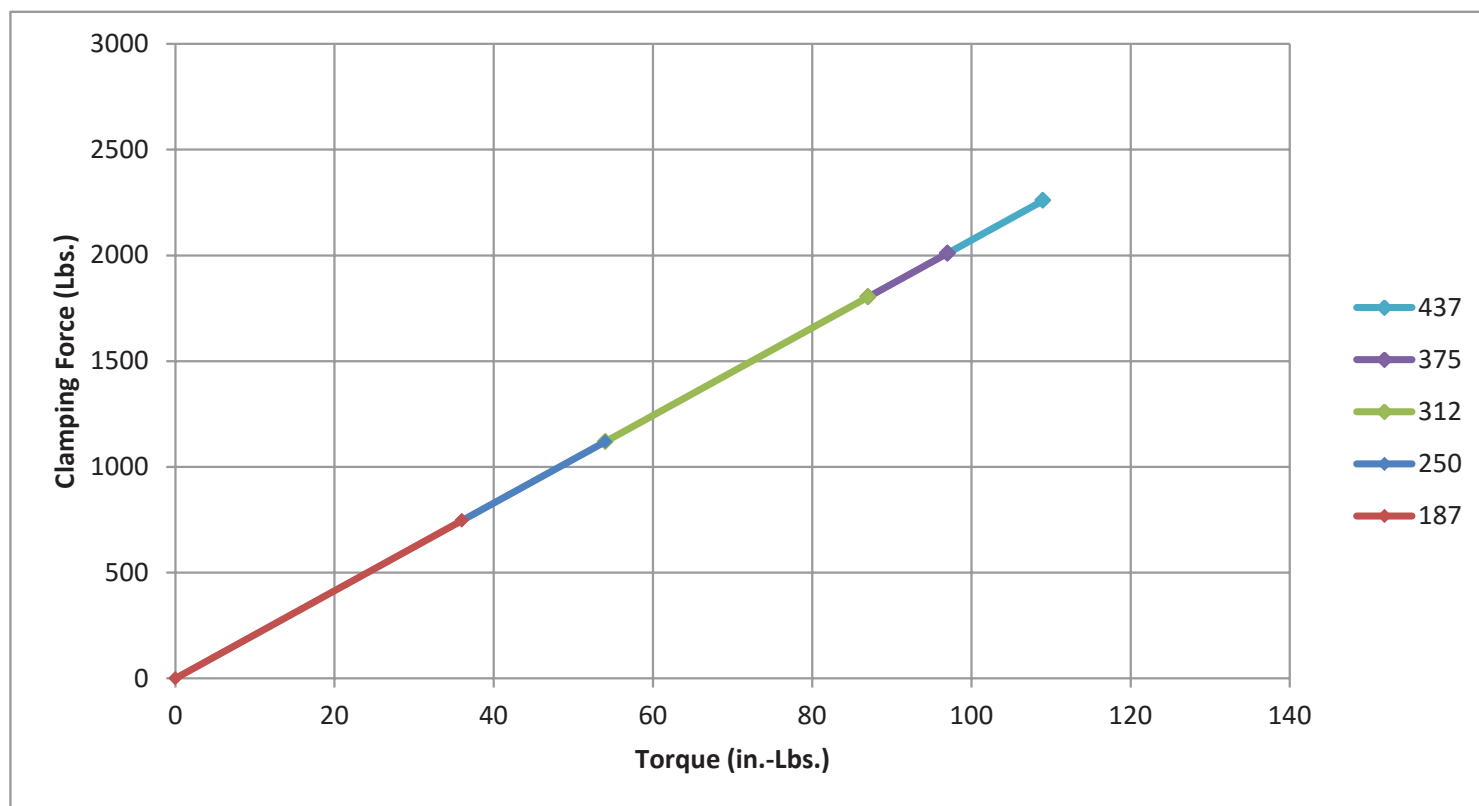

* Exceeding the listed values will run the risk of damaging clamping components and/or KSK product and is not recommended.





Super Kwik-Lok® TEMPORARY FASTENERS

ORDERING INFORMATION FOR KSK STYLE



HOW TO SELECT PART NUMBER:

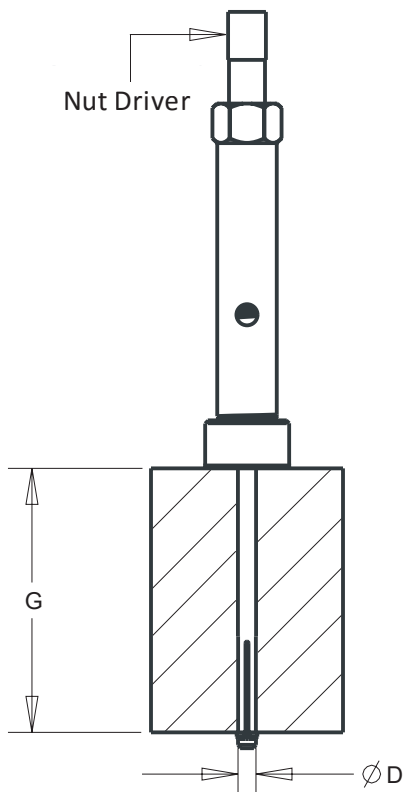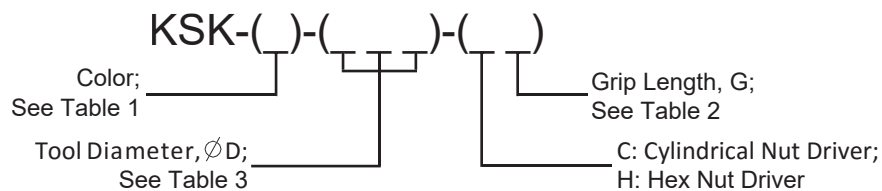

Example:
KSK-A-187-C4

.187" tool Diameter,
Cylindrical Nut,
1.50-2.50" grip length,
Aluminum Bushing.

Table 1: Color	
A	Aluminum
K	Black
B	Blue
C	Copper
G	Green
O	Orange
R	Red
S	Silver/Gray
W	White
Y	Yellow

Table 2: Grip Length, G	
1	0.00 – 1.00
2	0.50 – 1.50
3	1.00 – 2.00
4	1.50 – 2.50
5	2.00 – 3.00
6	2.50 – 3.50
7	3.00 – 4.00
8	3.50 – 4.50
9	4.00 – 5.00

Table 3: Hole Diameter, ϕD	
187	.1875
250	.2500
312	.3125
375	.3750
437	.4375
500	.5000

Notes:

1. Actual tool diameter is manufactured 0.003 to 0.005 less than Hole call out.
2. Standard color is aluminum.



Super Kwik-Lok[®] TEMPORARY FASTENERS

ORDERING INFORMATION



**KSKC Style
Customizable
bushing available**

HOW TO SELECT PART NUMBER:

Example:

KSKC-C-250-C6-BBB

.250" tool Diameter,
Cylindrical Nut,
2.50-3.50" grip length,
Copper Bushing, with $\varnothing 1.00 \times \varnothing .562 \times 1.280$.

KSKC-()-()-()-()-()-()

Color; See Table 1

Tool Diameter, $\varnothing D$
Choose desired value

C: Cylindrical Nut Driver;
H: Hex Nut Driver

Grip Length, G;
See Table 2

Lower Bushing Diameter, $\varnothing A$
See table 4

Upper Bushing Diameter, $\varnothing B$
See table 5

Bushing Length, C;
See Table 6

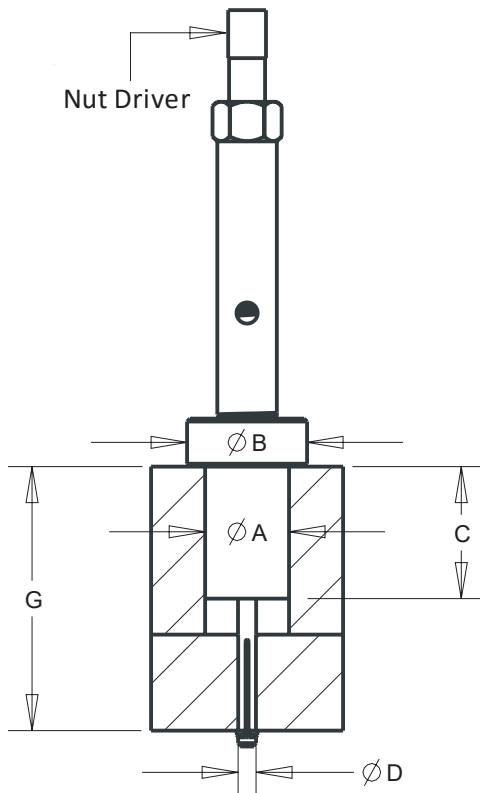


Table 1: Color

A	Aluminum
K	Black
B	Blue
C	Copper
G	Green
O	Orange
R	Red
S	Silver/Gray
W	White
Y	Yellow

Table 2: Grip Length, G

1	0.00 – 1.00
2	0.50 – 1.50
3	1.00 – 2.00
4	1.50 – 2.50
5	2.00 – 3.00
6	2.50 – 3.50
7	3.00 – 4.00
8	3.50 – 4.50
9	4.00 – 5.00

Table 3: Hole Diameter, $\varnothing D$

187	.1875
250	.2500
312	.3125
375	.3750
437	.4375
500	.5000

Table 4: Lower Bushing Diameter, $\varnothing A$

A	.500
B	.562
C	.610
D	.750
E	.874
F	.438
G	.625
H	.312
I	.813
J	1.124
K	1.250
L	1.000

Table 5: Upper Bushing Diameter, $\varnothing B$

A	0.87
B	1.00
C	1.20
D	1.25
E	1.06
F	1.38
G	1.67
H	1.42
I	1.50
J	1.75

Table 6: Bushing Length, C

A	0.67
B	1.28
C	1.38
D	1.50
E	3.00
F	1.18
G	1.46
H	1.75
I	1.00
J	0.75

Notes:

1. Actual tool diameter is manufactured 0.003 to 0.005 less than Hole call out.
2. Standard color is black.

ZEPHYR TOOL GROUP

201 Hindry Avenue

Inglewood, CA 90301

Tel. 310-410-4907 ■ Email: sales@zephyrtoolgroup.com ■ zephyrtoolgroup.com





Super Kwik-Lok® TEMPORARY FASTENERS

ORDERING INFORMATION FOR KSKF STYLE



HOW TO SELECT PART NUMBER:

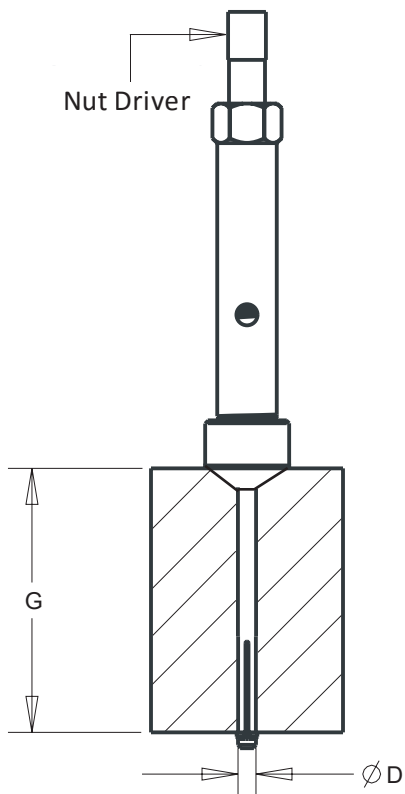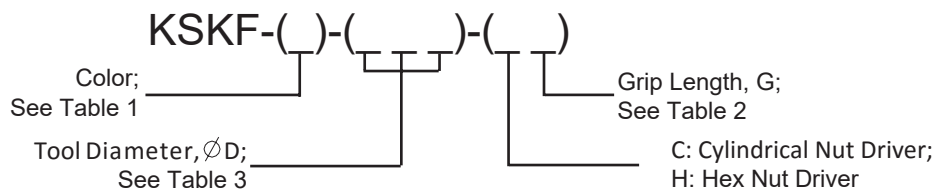

Example:
KSKF-K-312-C2

.312" tool Diameter,
Cylindrical Nut,
.50-1.50" grip length,
Black Bushing.

Table 1: Color	
A	Aluminum
K	Black
B	Blue
C	Copper
G	Green
O	Orange
R	Red
S	Silver/Gray
W	White
Y	Yellow

Table 2: Grip Length, G	
1	0.00 – 1.00
2	0.50 – 1.50
3	1.00 – 2.00
4	1.50 – 2.50
5	2.00 – 3.00
6	2.50 – 3.50
7	3.00 – 4.00
8	3.50 – 4.50
9	4.00 – 5.00

Table 3: Hole Diameter, $\varnothing D$	
187	.1875
250	.2500
312	.3125
375	.3750
437	.4375
500	.5000

Notes:

1. Actual tool diameter is manufactured 0.003 to 0.005 less than Hole call out.
2. Standard color is black.
3. Standard angle is 100 deg.



Super Kwik-Lok[®]

TEMPORARY FASTENERS

ORDERING INFORMATION



KSKJ Style
Customizable
bushing available

HOW TO SELECT PART NUMBER:

Example:

KSKJ-O-375-C4-FA

.375" tool Diameter,
 Cylindrical Nut,
 1.50-2.50" grip length,
 Orange Bushing, with $\phi 1.107 \times .75$

KSKJ-()-()-()-()

Color;

See Table 1

Tool Diameter, ϕD
 Choose desired value

C: Cylindrical Nut Driver;

H: Hex Nut Driver

Bushing length,
 See table 4

Bushing Diameter, ϕA
 See table 3

Grip Length, G;
 See Table 2

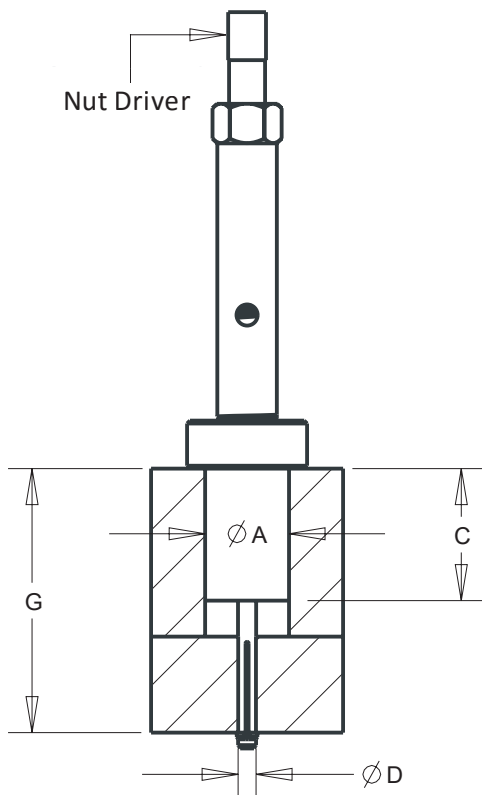


Table 1: Color

A	Aluminum
K	Black
B	Blue
C	Copper
G	Green
O	Orange
R	Red
S	Silver/Gray
W	White
Y	Yellow

Table 2: Grip Length, G

1	0.00 – 1.00
2	0.50 – 1.50
3	1.00 – 2.00
4	1.50 – 2.50
5	2.00 – 3.00
6	2.50 – 3.50
7	3.00 – 4.00
8	3.50 – 4.50
9	4.00 – 5.00

Table 3: Bushing Diameter
 ϕA

A	0.448
B	0.855
C	0.942
D	0.981
E	0.997
F	1.107
G	1.123

Table 4: Bushing
Length, C

A	0.75
---	------

Notes:

1. Actual tool diameter is manufactured 0.003 to 0.005 less than Hole call out.
2. Standard color is black.

ZEPHYR TOOL GROUP

201 Hindry Avenue

Inglewood, CA 90301

Tel. 310-410-4907 ■ Email: sales@zephyrtoolgroup.com ■ zephyrtoolgroup.com



KWTC - Series

TEMPORARY FASTENER INSTALLATION AND REMOVAL TOOL

This tool is able to operate our KSK, KSKC, KSKF, and KSKJ fasteners

A simple to operate, yet rugged power tool for the installation and removal of a wide range of power operated KSK fasteners.

- Heavy duty
- Simple to insert and remove cylindrical or hex nut fasteners
- Small nose piece allows easy accessibility where fasteners are close together
- Reversible motor with finger tip control for switching to reverse
- Greater torque in reverse for those difficult removals
- RPM programmable via USB

Available Torque Tange		RPM
T1	5-17 in-lbs	400-1300
T2	9-35 in-lbs	150-900
T3	27-70 in-lbs	150-900
T4	45-106 in-lbs	100-600



Shown above with
Makita motor
(See left chart for more specifications)

HOW TO ORDER

SELECT PART NUMBER

Available Drive Size							
Drive Size	187	250	312	375	437	500	562
39-62	X	X	X	X			
55-87					X	X	X
Drive Nut							
CB	X	X	X	X			
H	X	X	X	X	X	X	X

KWTC- () - () - () - ()

Leave blank for Makita (Battery operated, as shown above)
A = Atlas Copco (Pneumatic)
IR = Ingersoll Rand (Battery operated)

Torque (T1, T2, T3, T4)

Drive Size (See chart)

Drive Nut (CB = Cylindrical Drive, H = Hex Drive)

KWIK-LOK® Super Driver

Battery & Charger Sold Separately
Please specify charger voltage when ordering



KWTC-M Series TEMPORARY FASTENER INSTALLATION AND REMOVAL TOOL

Zephyr introduces our new tool for "Midget" temporary fasteners.




Shown above with
Atlas Copco motor
(see Motor specifications below)

- Heavy duty rugged design with balanced nose
- Simple to insert and remove on and off the fastener.
- Small nose piece allows easy accessibility where fasteners are close together.
- Reversible motor with finger tip control for quickly switching to reverse.
- Higher torque in reverse for greater torque demand during removal.
- Quick Change Release for ease replacement of Power Bit driver.

ORDERING INFORMATION

HOW TO SELECT PART NUMBER

KWTC- M() - 562

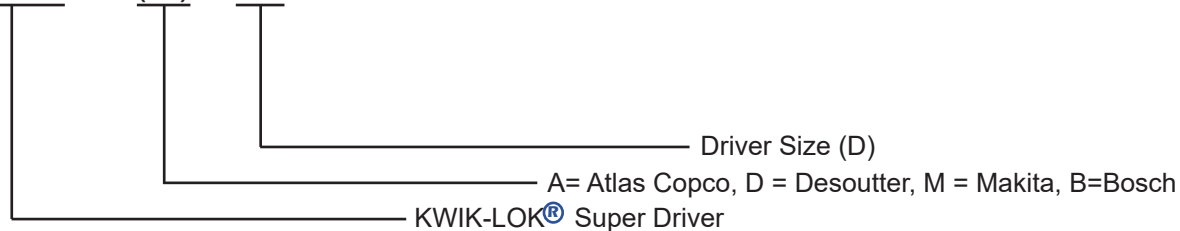

Available in both air tool motors and battery operated (cordless) type motors.

Motor Specifications (Atlas Copco):

RPM	2300
Torque Range Soft Joint	5-15 in-lbs.
Weight	1.5 lb
Operating Pressure	90 PSI